

# AULOX

## AX-TYWFVAL0A

### Smart-Valve-Control

## WHITE&BLACK WIFI SMART CONTROLLER

Equipped with an alarm

APP Control

Voice Control

Timing Control

Manual  
On/Off  
Control

One-button  
on/off

Mobile phone  
remote

Smart timing

Voice control

Intelligent  
linkage

Scene  
mode

Multi-tube  
adaptation

Easy to  
install

## INSULATION AND SEALING WATERPROOF DESIGN

Cap-style design, tightly stitched at the joints, effectively waterproof and splash-proof

## DIMENSIONAL DRAWING



## INSTALLATION DIAGRAM


### Schematic diagram of home gas installation



### Schematic diagram of tap water installation



## PRODUCT INTRODUCTION

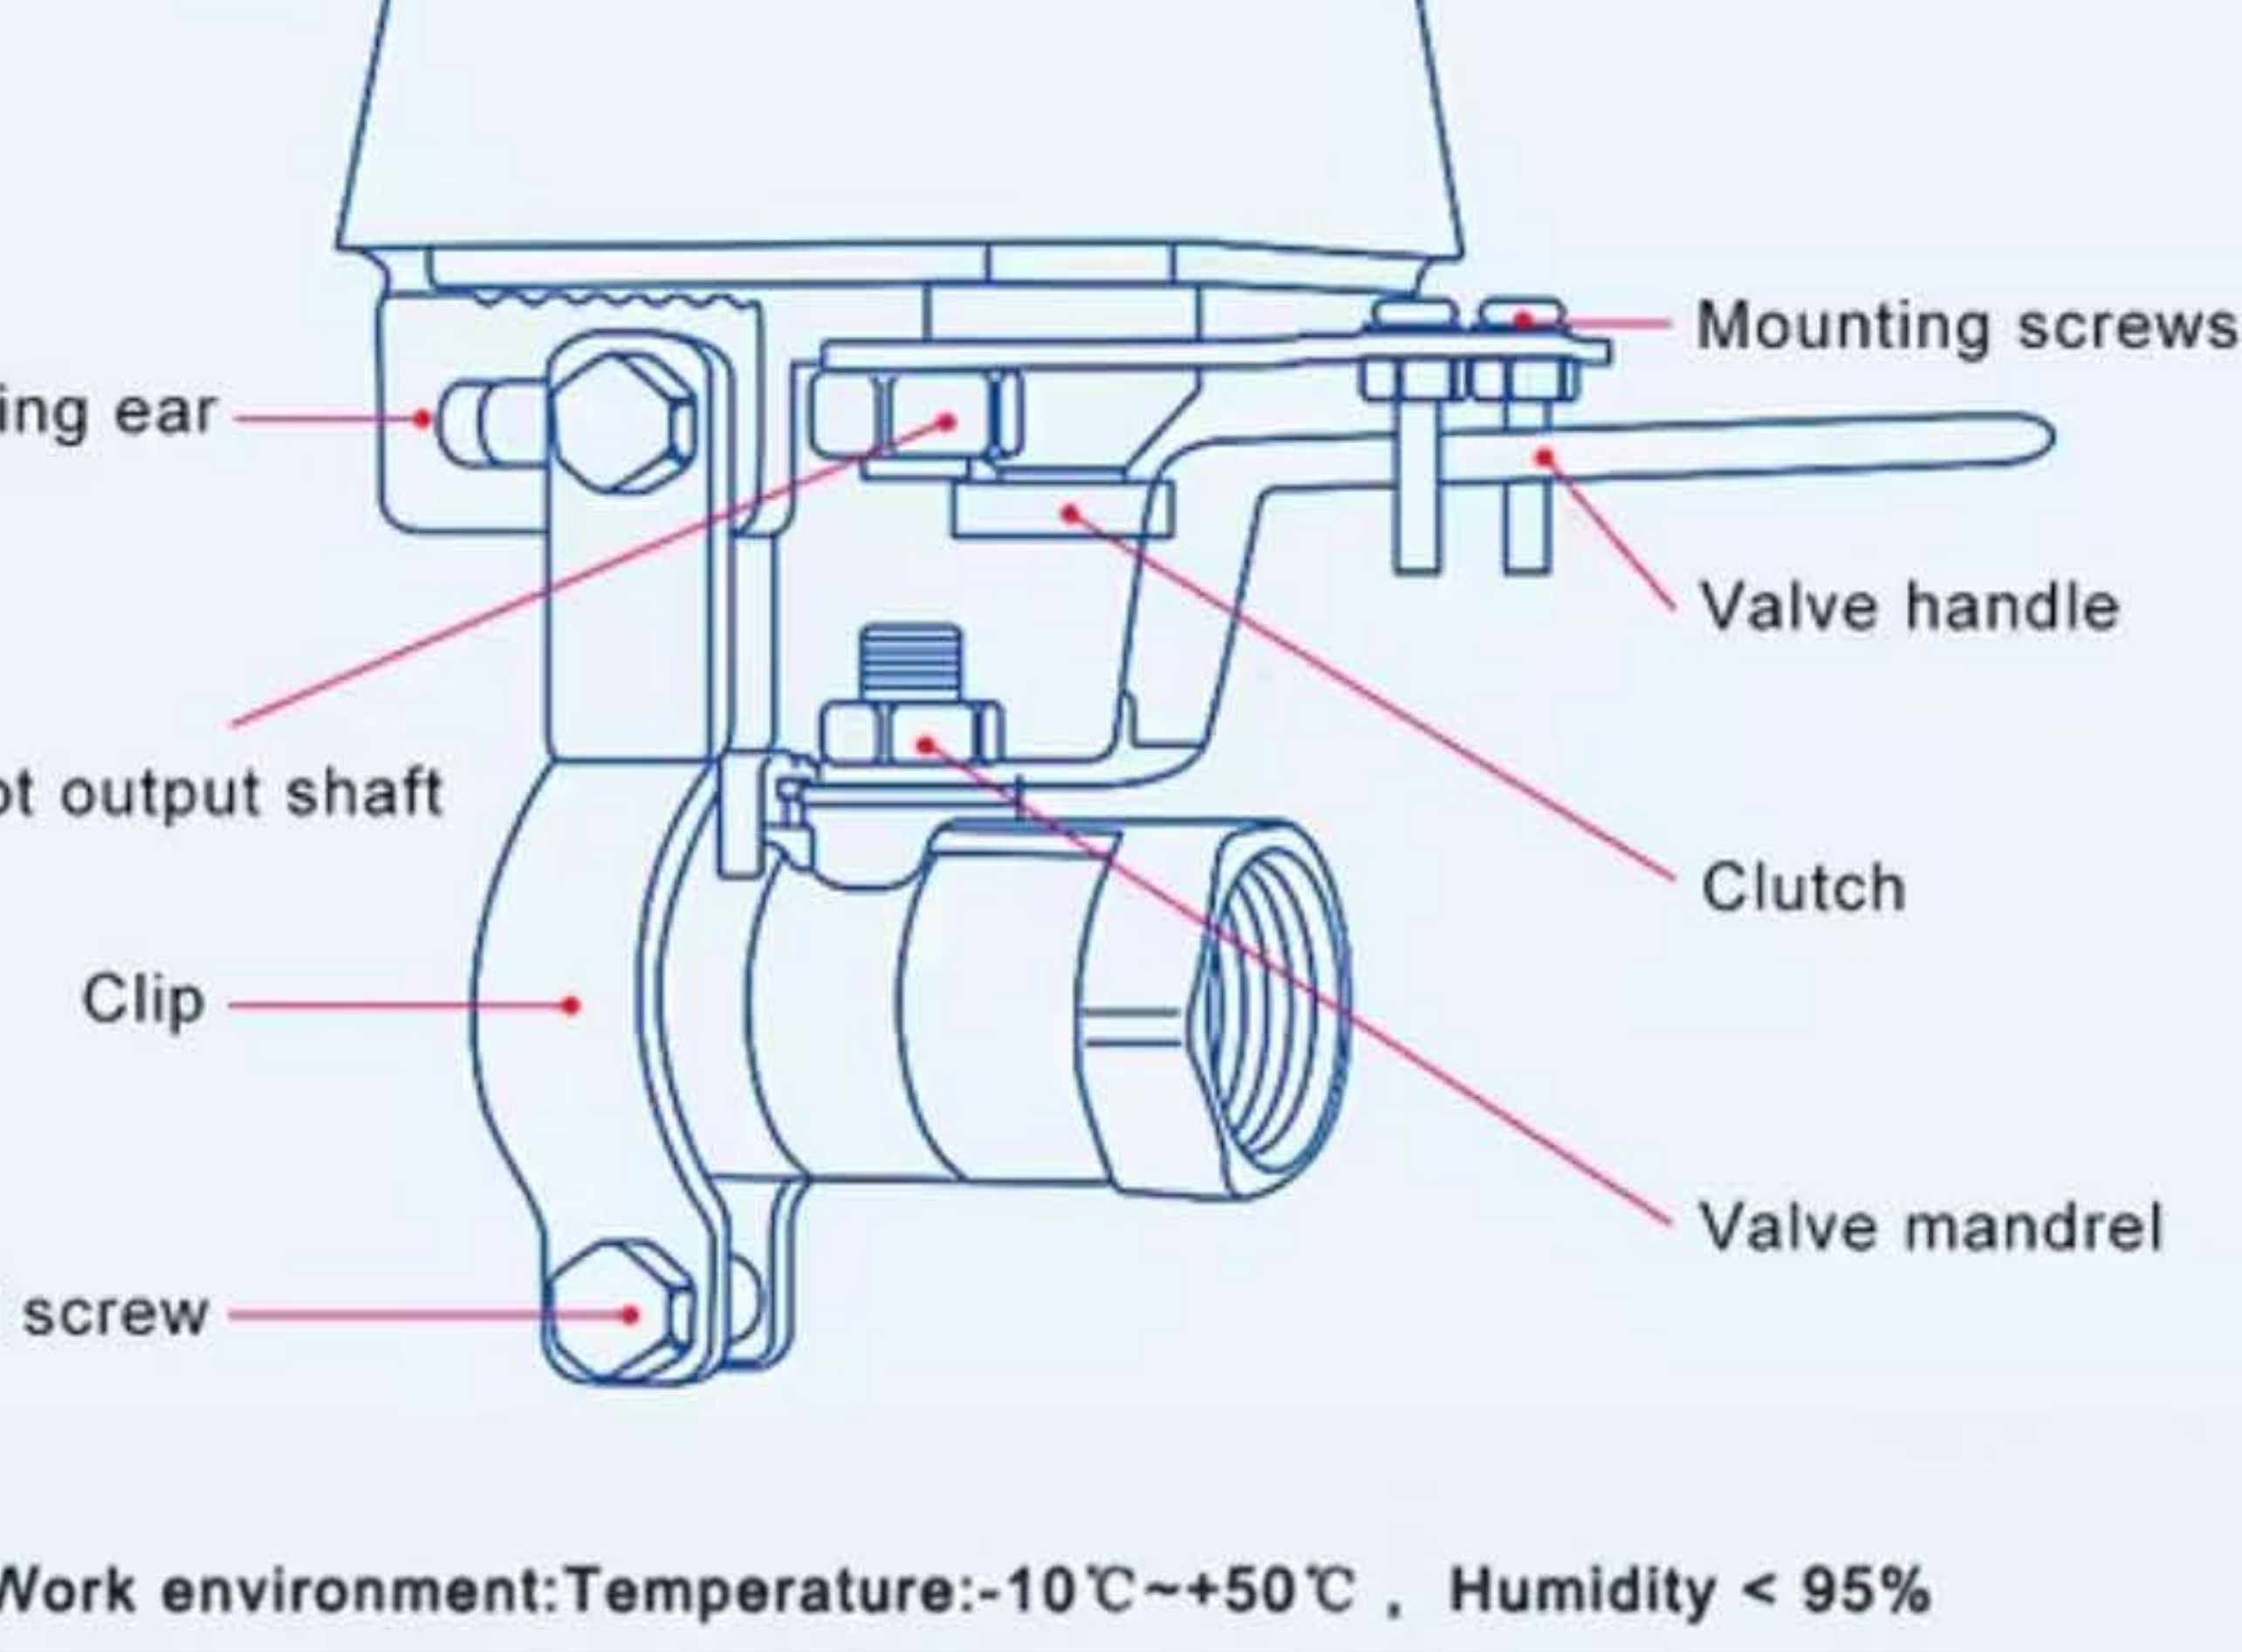

Work environment: Temperature:  $-10^{\circ}\text{C} \sim +50^{\circ}\text{C}$  , Humidity < 95%

Rated voltage: DC12V

Working voltage: DC6~18V

Rated current: 100mA

Working current: 20mA~1000mA

Rated power: 1.2W

Working power: 0.24~10W

Valve pressure: 1.6Mpa

Insulation resistance: > 20MΩ

Torqu: 30~60kg.cm

Valve closing time: 5~10 seconds

Protocol: WIFI IEEE 802.11b/gn